



# BW 2540 ES

Energy-saving brackish water RO membrane for commercial applications

## Key Features

- High permeate flow rate and salt rejection at low feed pressures
- Good durability

## Main Benefits

- Low energy consumption
- High permeate water quality

## Ideal Applications

- Light industrial process water
- Commercial applications


## Performance Specifications

| Item                      | Unit                              | Value     |
|---------------------------|-----------------------------------|-----------|
| Permeate Flow Rate        | GPD (m <sup>3</sup> /d)           | 750 (2.8) |
| Stabilized Salt Rejection | %                                 | 99.5      |
| Minimum Salt Rejection    | %                                 | 99.2      |
| Active Membrane Area      | ft <sup>2</sup> (m <sup>2</sup> ) | 22 (2.0)  |
| Feed Spacer Thickness     | mil                               | 28        |

The specifications outlined above are normalized performances based on the following test conditions:

- **Test Condition:** 2,000 ppm NaCl, 150 psi (10.3 bar), 25°C (77°F), pH 7, Recovery 15%
- Permeate flow rates for individual elements may vary by ±20%

## Dimensions and Weight

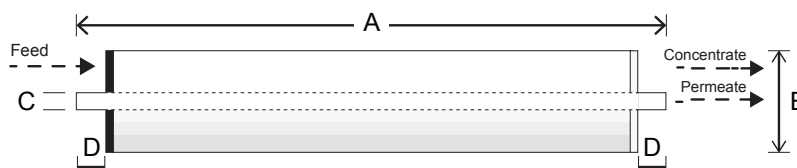

| Dimensions: mm (in) |              |                |                | Wet Weight: kg (lbs) |
|---------------------|--------------|----------------|----------------|----------------------|
| A                   | B            | C              | D              | 1.9 (4.2)            |
| Element Length      | Element O.D. | Core Tube I.D. | Core Tube Ext. |                      |
| 1,016 (40)          | 60 (2.4)     | 19 (0.75)      | 32 (1.3)       |                      |

All dimensional information is indicative and for reference only. Please contact NanoH2O for detailed technical specifications.

## Operating Specifications

| Specification                               | Unit                    | Value      |
|---------------------------------------------|-------------------------|------------|
| Maximum Applied Pressure                    | psi (bar)               | 600 (41.3) |
| Maximum Chlorine Concentration              | ppm                     | < 0.1      |
| Maximum Operating Temperature               | °C (°F)                 | 45 (113)   |
| pH Range, Continuous Operation              |                         | 2–11       |
| pH Range, Cleaning                          |                         | 2–12       |
| Maximum Feed Water Turbidity                | NTU                     | 1.0        |
| Maximum Feed Water SDI <sub>15</sub>        |                         | 5.0        |
| Maximum Feed Flow                           | gpm (m <sup>3</sup> /h) | 6 (1.4)    |
| Maximum Pressure Drop (ΔP) for Each Element | psi (bar)               | 15 (1.0)   |

These operating specifications are for general use. For specific applications, operation at more conservative values may ensure better performance and extended membrane life. See NanoH2O Technical Bulletins for more details.



Homepage



LinkedIn



Youtube



This product is certified to NSF/ANSI/CAN Standard 61 for drinking water systems