

NF7

NANO H2O

More Water. Precision Separation.

NanoH2O™ NF7 gives you more water for less energy. Its best-in-class productivity means higher permeate output at the same feed pressure, cutting the energy cost that dominates nanofiltration O&M.

Precision separation keeps water quality where you need it — strong hardness and multivalent-ion removal, excellent organics and PFAS control.

A low-differential-pressure design reduces fouling, so clients clean less often and membranes last longer.

The result is simple: more water, better quality, easier operation, and a lower total cost of ownership.

Easy to deploy in both new plants and existing-plant retrofits, NF7 delivers the optimal solution for improving water treatment efficiency with precision separation that serves various client needs.



Best-in-class Productivity
for Energy Savings



Precision Separation
for Customized Water Solutions



Excellent Fouling Resistance
for Reliable Operation


Performance Specifications

Model	Permeate Flow rate GPD(m³/d)	Minimum Salt Rejection %	Active Membrane Area ft²(m²)	Feed Spacer
NF7	13,000 (49.2)	98.0	400 (37)	34 mil, low dP
NF7+	14,300 (54.1)	98.0	440 (41)	28 mil, low dP

The specifications outlined above are normalized performances based on the following test conditions :
2,000 ppm MgSO₄, 70 psi (4.8 bar), 25 °C (77°F), pH 7, Recovery 15%

Best-in-class Productivity


Permeate Flow rate Comparison (Unit: GPD)

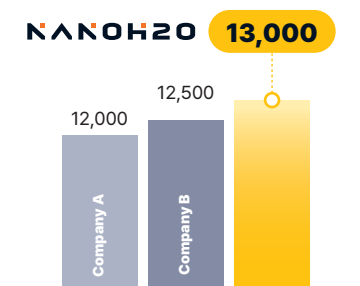

* Membrane Active Area: 400 ft²
* Test Conditions: 2,000 ppm MgSO₄, 70-75 psi, 15% recovery, pH 7, 25 °C
* Permeate flow data are based on manufacturer's published specifications under respective standard test conditions.

Precision Separation


Advanced Monovalent/Divalent Ion Selectivity

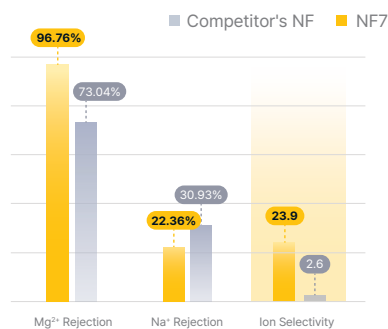

* Membrane Active Area: 400 ft²
* Test Conditions: NaCl 1,000 ppm + 1,000 ppm MgSO₄, 70 psi
* Source: In-house Test Data

Excellent Fouling Resistance

Differential Pressure Comparison

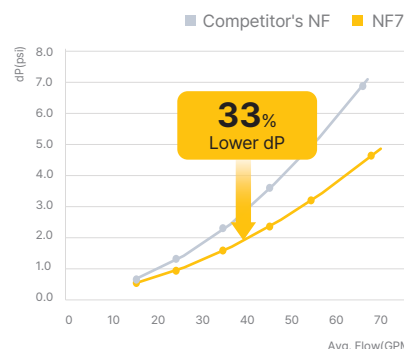


* 33% lower dP refers to the difference in pressure drop (dP) between NF7 and a competing NF product at the average flow rate of 44 gpm.
* Source: In-house Test Data

NF7 Value Proposition

More Water. Precision Separation.

NF7 delivers industry-leading productivity while maintaining strong water quality and separation performance, enabling more water production, lower operating costs, and reliable long-term operation.

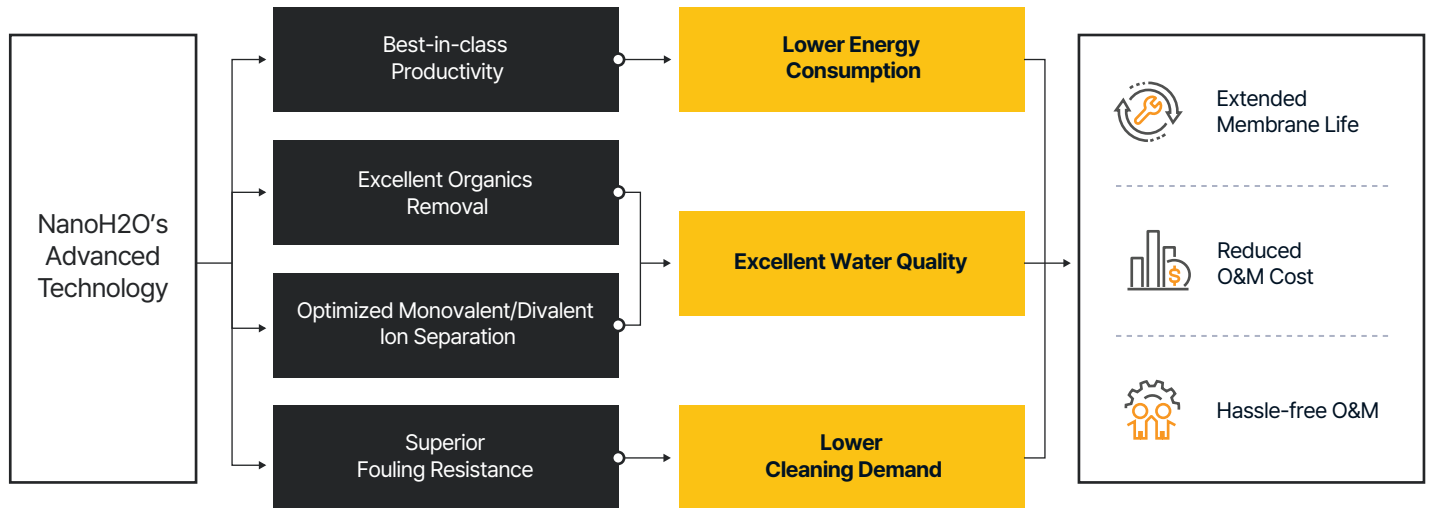

Why Choose NanoH2O™ NF7?

New Benchmark for Next-generation NF



MORE WATER

Best-in-class Productivity

13%*

Higher Flow, Resulting in Reduced Energy Consumption

PRECISION SEPARATION

Excellent Water Quality & Separation Performance

10%pt*

Higher Hardness Rejection, Delivering Better Water Quality

LOWER FOULING

Easy O&M

33%*

Lower Differential Pressure, Enabling Less Cleaning and Longer Membrane Life

* Source: Field Test & Internal Test (NF7 vs. Competitor's NF)

Follow us on our channels.

www.nanoh2owater.com



The information contained herein is deemed to be accurate and reliable and are offered in good faith, but without guarantee of performance. NanoH2O assumes no liability for results obtained or damages incurred through the application of the information contained herein. Customer is responsible for determining whether the products and information presented are appropriate for the customer's use and for ensuring that customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Specifications subject to change without notice.

All rights reserved. © NanoH2O Co., Ltd.

